


MAGNETON

ALTERNATOR

9513 013

IMPORTANT DIMENSIONS TO FIT ON ENGINE

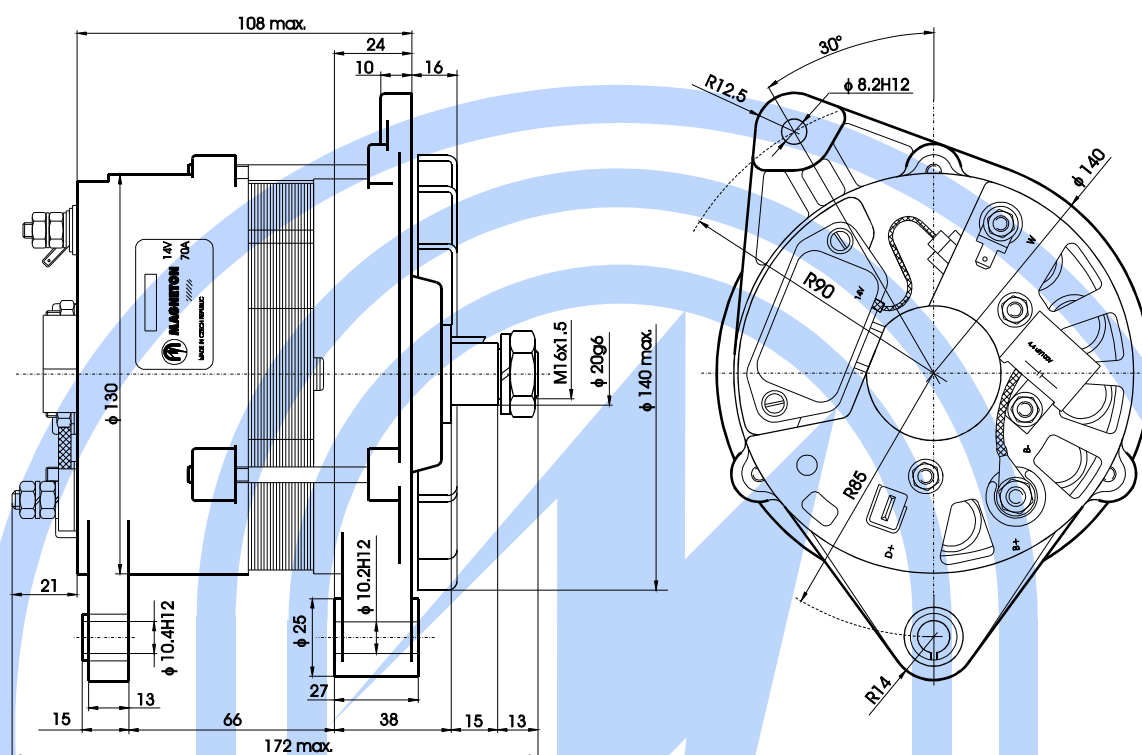

TECHNICAL DATA

Nominal voltage
Rated current at 1 800min⁻¹
Rated current at 6 000min⁻¹

14V
25A
70A

Maximum speed
Zero speed
Weight

10 000min⁻¹
1 300min⁻¹
4,7kg

APPLICATIONS

- with separate wrapped CF fan
- without pulley

1. ZETOR

CROSS REFERENCES

Zetor 53.350.906

This alternator is replacing 9516 673.

Použití alternátoru 9513 013

Applications of alternator 9513 013

Page 2 / 3

BRAND	MODEL	TYPE	ENGINE kW	PS	ccm	PRODUCTION YEAR
ZETOR		10540; 10541				01/95 -
ZETOR		3321				01/97 -
ZETOR		3341				01/97 -
ZETOR		4321				01/97 -
ZETOR		4341				01/97 -
ZETOR		5321				01/97 -
ZETOR		5341				01/97 -
ZETOR		6321				01/97 -
ZETOR		6341				01/97 -
ZETOR		7320; 7321				01/92 -
ZETOR		7340; 7341				01/92 -
ZETOR		7520				01/91 - 01/98
ZETOR		7540				01/91 - 01/98
ZETOR		8520				01/91 -
ZETOR		8540				01/94 -
ZETOR		9520				01/91 - 01/2000
ZETOR		9540				01/91 - 01/2000

Náhradní díly alternátoru 9513 013

Spare parts of alternator 9513 013

Page 3 / 3

1.0 Víko přední sestavené Front cover assy		Cat. No. 0133270
2.0 Rotor sestavený Rotor assy		Cat. No. 0133210
3.0 Víko zadní sestavené Rear cover assy		Cat. No. 0142520
4.0 Usměrňovací blok Rectifier		Cat. No. 0140890
5.0 Držák uhlíků s regulátorem Brush holder with regulator		Cat. No. 0143711
6.0 Stator sestavený Stator assy		Cat. No. 0135001
7.0 Řemenice Pulley		Cat. No. -
8.0 Ventilátor Fan		Cat. No. 5233530

Poznámka Note

1. *Víko přední sestavené je dodáváno včetně předního ložiska.*
Front cover assembly is supplied with front bearing.
2. *Rotor sestavený je dodáván včetně zadního ložiska.*
Rotor assembly is supplied with rear bearing.
3. *Víko zadní sestavené je dodáváno včetně usměrňovače.*
Rear cover assembly is supplied with the rectifier.

