



# ROTATING BEACON L-BERRY

**EN**

## SPECIFICATIONS

|                         |                                    |
|-------------------------|------------------------------------|
| Voltage                 | 12-24 VDC                          |
| LED qty                 | 40 LED                             |
| Mount                   | teleskopická tyč                   |
| Temperature reliability | -30 °C - +50 °C                    |
| IP rating               | IP56                               |
| Approval                | ECE R10                            |
| Flash patterns          | double flash, quad flash, rotation |

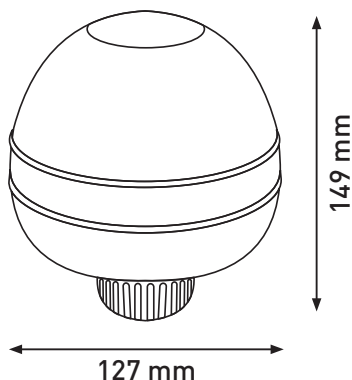

### WARNING!

- Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage.

Exclusive distributor for EU: KUTNAK AUTOMOTIVE, s.r.o.  
 Průmyslová 518 | 763 17 Lukov u Zlína | Czech Republic  
 tel.: +420 571 895 549 | email: info@kutnak.cz