


MAGNETON

ALTERNATOR 9515 652

IMPORTANT DIMENSIONS TO FIT ON ENGINE

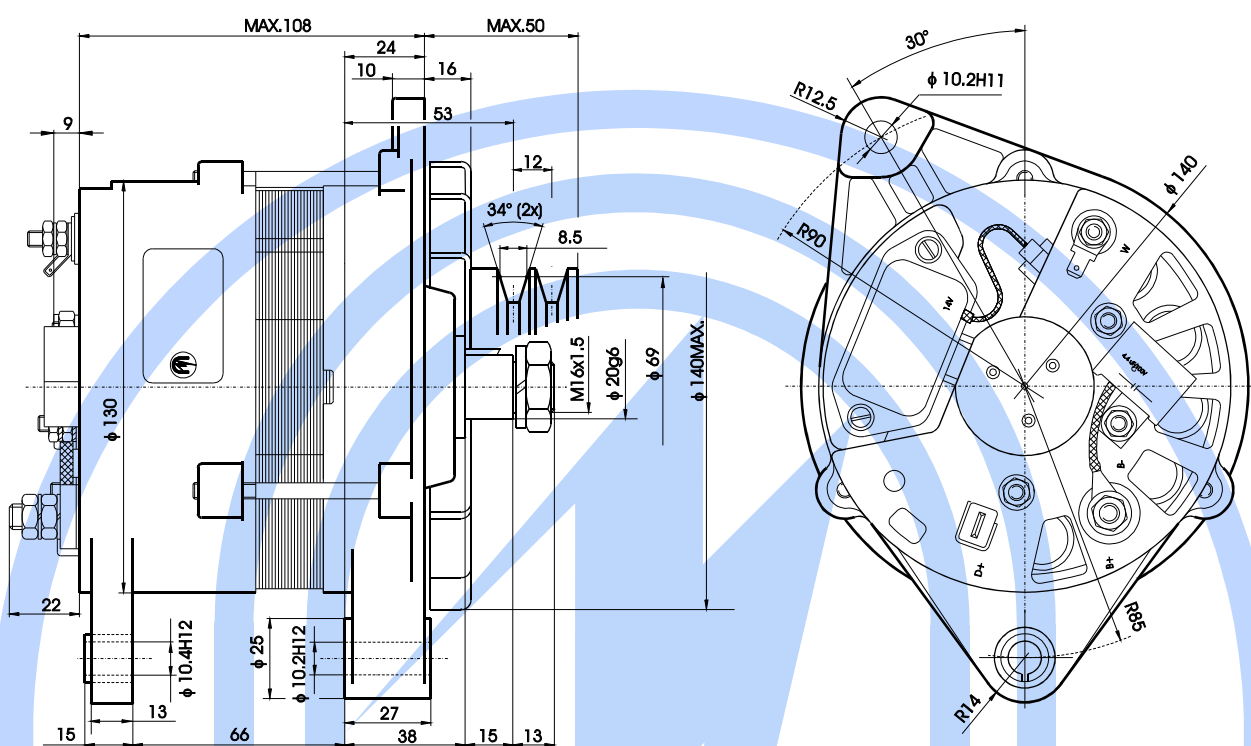

TECHNICAL DATA

Nominal voltage
Rated current at 1 800min⁻¹
Rated current at 6 000min⁻¹

14V
32A
55A

Maximum speed
Zero speed
Weight

13 000min⁻¹
1 000min⁻¹
5,1kg

APPLICATIONS

1. URSUS

CROSS REFERENCES

ELMOT

A 125 - 55j

Použití alternátoru 9515 652

Applications of alternator 9515 652

Page 2 / 3

BRAND	MODEL	TYPE	ENGINE	kW	PS	ccm	PRODUCTION YEAR
URSUS	912	Z 8401.1		58,8		4 500	
URSUS	914	Z 8401.1		58,8		4 500	
URSUS	914	Z 8401.1		58,8		4 500	
URSUS	932	Z 8401.12		58,8		4 500	
URSUS	934	Z 8401.12		58,8		4 500	
URSUS	1012	Z 8002.1 Turbo		70,5		4 500	
URSUS	1014	Z 8002.1 Turbo		70,5		4 500	
URSUS	1132	Z 8002.1 Turbo		70,5		4 500	
URSUS	1134	Z 8002.1 Turbo		70,5		6 800	
URSUS	1222	Z 8701.12		86		6 800	
URSUS	1224	Z 8701.12		86		6 800	
URSUS	1232	Z 8002.13		86		6 800	
URSUS	1234	Z 8002.13		86		6 800	
URSUS	1634	Z 8602.12 Turbo		114		6 800	
URSUS	1734	Z 8602.12 Turbo		114		6 800	

Náhradní díly alternátoru 9515 652

Spare parts of alternator 9515 652

Page 3 / 3

1.0 Víko přední sestavené Front cover assy		Cat. No. 0133222
2.0 Rotor sestavený Rotor assy		Cat. No. 0133211
3.0 Víko zadní sestavené Rear cover assy		Cat. No. 0141221
4.0 Usměrňovací blok Rectifier		Cat. No. 0140841
5.0 Držák uhlíků s regulátorem Brush holder with regulator		Cat. No. 0143410
6.0 Stator sestavený Stator assy		Cat. No. 0136071
7.0 Řemenice Pulley		Cat. No. 6021017
8.0 Ventilátor Fan		Cat. No. 5233530

Poznámka Note

1. *Víko přední sestavené je dodáváno včetně předního ložiska.*
Front cover assembly is supplied with front bearing.
2. *Rotor sestavený je dodáván včetně zadního ložiska.*
Rotor assembly is supplied with rear bearing.
3. *Víko zadní sestavené je dodáváno včetně usměrňovače.*
Rear cover assembly is supplied with the rectifier.

