


MAGNETON

ALTERNATOR

9516 673

IMPORTANT DIMENSIONS TO FIT ON ENGINE

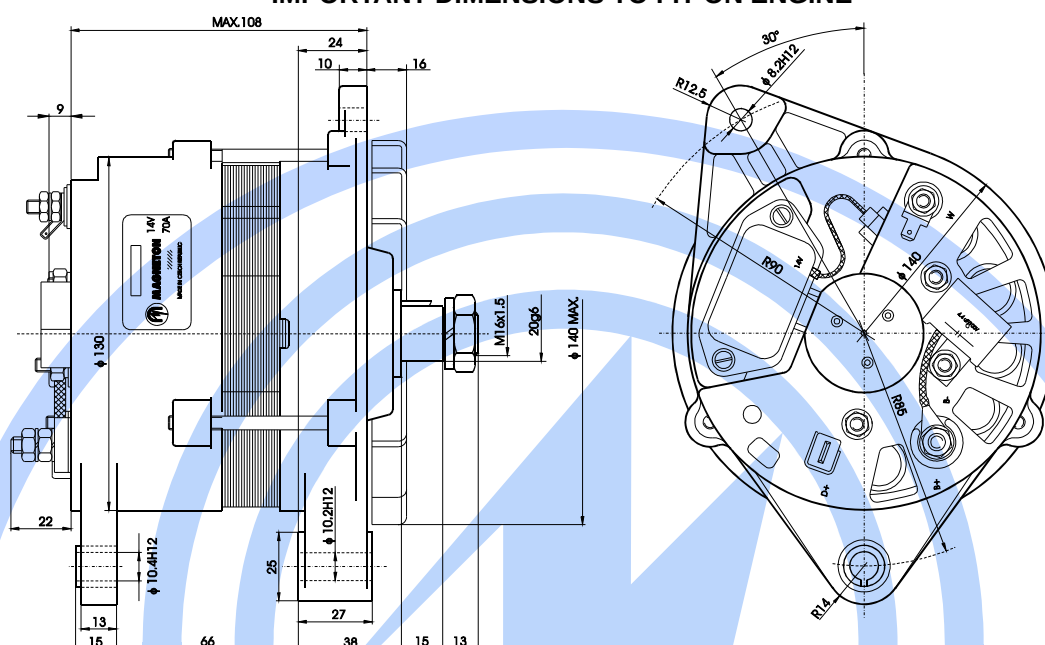

TECHNICAL DATA

Nominal voltage
Rated current at 1 800min⁻¹
Rated current at 6 000min⁻¹

14V
25A
70A

Maximum speed
Zero speed
Weight

9 000min⁻¹
1 300min⁻¹
4,5kg

APPLICATIONS

Alternator with separated wrapped fan
without pulley.

CROSS REFERENCES

LUCAS	LRA01654
CARGO	112035
ZETOR	53350906

Použití alternátoru 9516 673

Applications of alternator 9516 673

Page 2 / 3

BRAND	MODEL	TYPE	ENGINE kW	PS	ccm	PRODUCTION YEAR
ZETOR		10540; 10541				01/95 -
ZETOR		3321				01/97 -
ZETOR		3341				01/97 -
ZETOR		4321				01/97 -
ZETOR		4341				01/97 -
ZETOR		5321				01/97 -
ZETOR		5341				01/97 -
ZETOR		6321				01/97 -
ZETOR		6341				01/97 -
ZETOR		7320; 7321				01/92 -
ZETOR		7340; 7341				01/92 -
ZETOR		7520				01/91 - 01/98
ZETOR		7540				01/91 - 01/98
ZETOR		8520				01/91 -
ZETOR		8540				01/94 -
ZETOR		9520				01/91 - 01/2000
ZETOR		9540				01/91 - 01/2000

Náhradní díly alternátoru 9516 673

Spare parts of alternator 9516 673

Page 3 / 3

1.0 Víko přední sestavené Front cover assy		Cat. No. 0133220
2.0 Rotor sestavený Rotor assy		Cat. No. 0133211
3.0 Víko zadní sestavené Rear cover assy		Cat. No. 0141340
4.0 Usměrňovací blok Rectifier		Cat. No. 0140891
5.0 Držák uhlíků s regulátorem Brush holder with regulator		Cat. No. 0136560
6.0 Stator sestavený Stator assy		Cat. No. 0135001
7.0 Řemenice Pulley		Cat. No. -
8.0 Ventilátor Fan		Cat. No.

Poznámka Note

1. *Víko přední sestavené je dodáváno včetně předního ložiska.*
Front cover assembly is supplied with front bearing.
2. *Rotor sestavený je dodáván včetně zadního ložiska.*
Rotor assembly is supplied with rear bearing.
3. *Víko zadní sestavené je dodáváno včetně usměrňovače.*
Rear cover assembly is supplied with the rectifier.

